


C3400

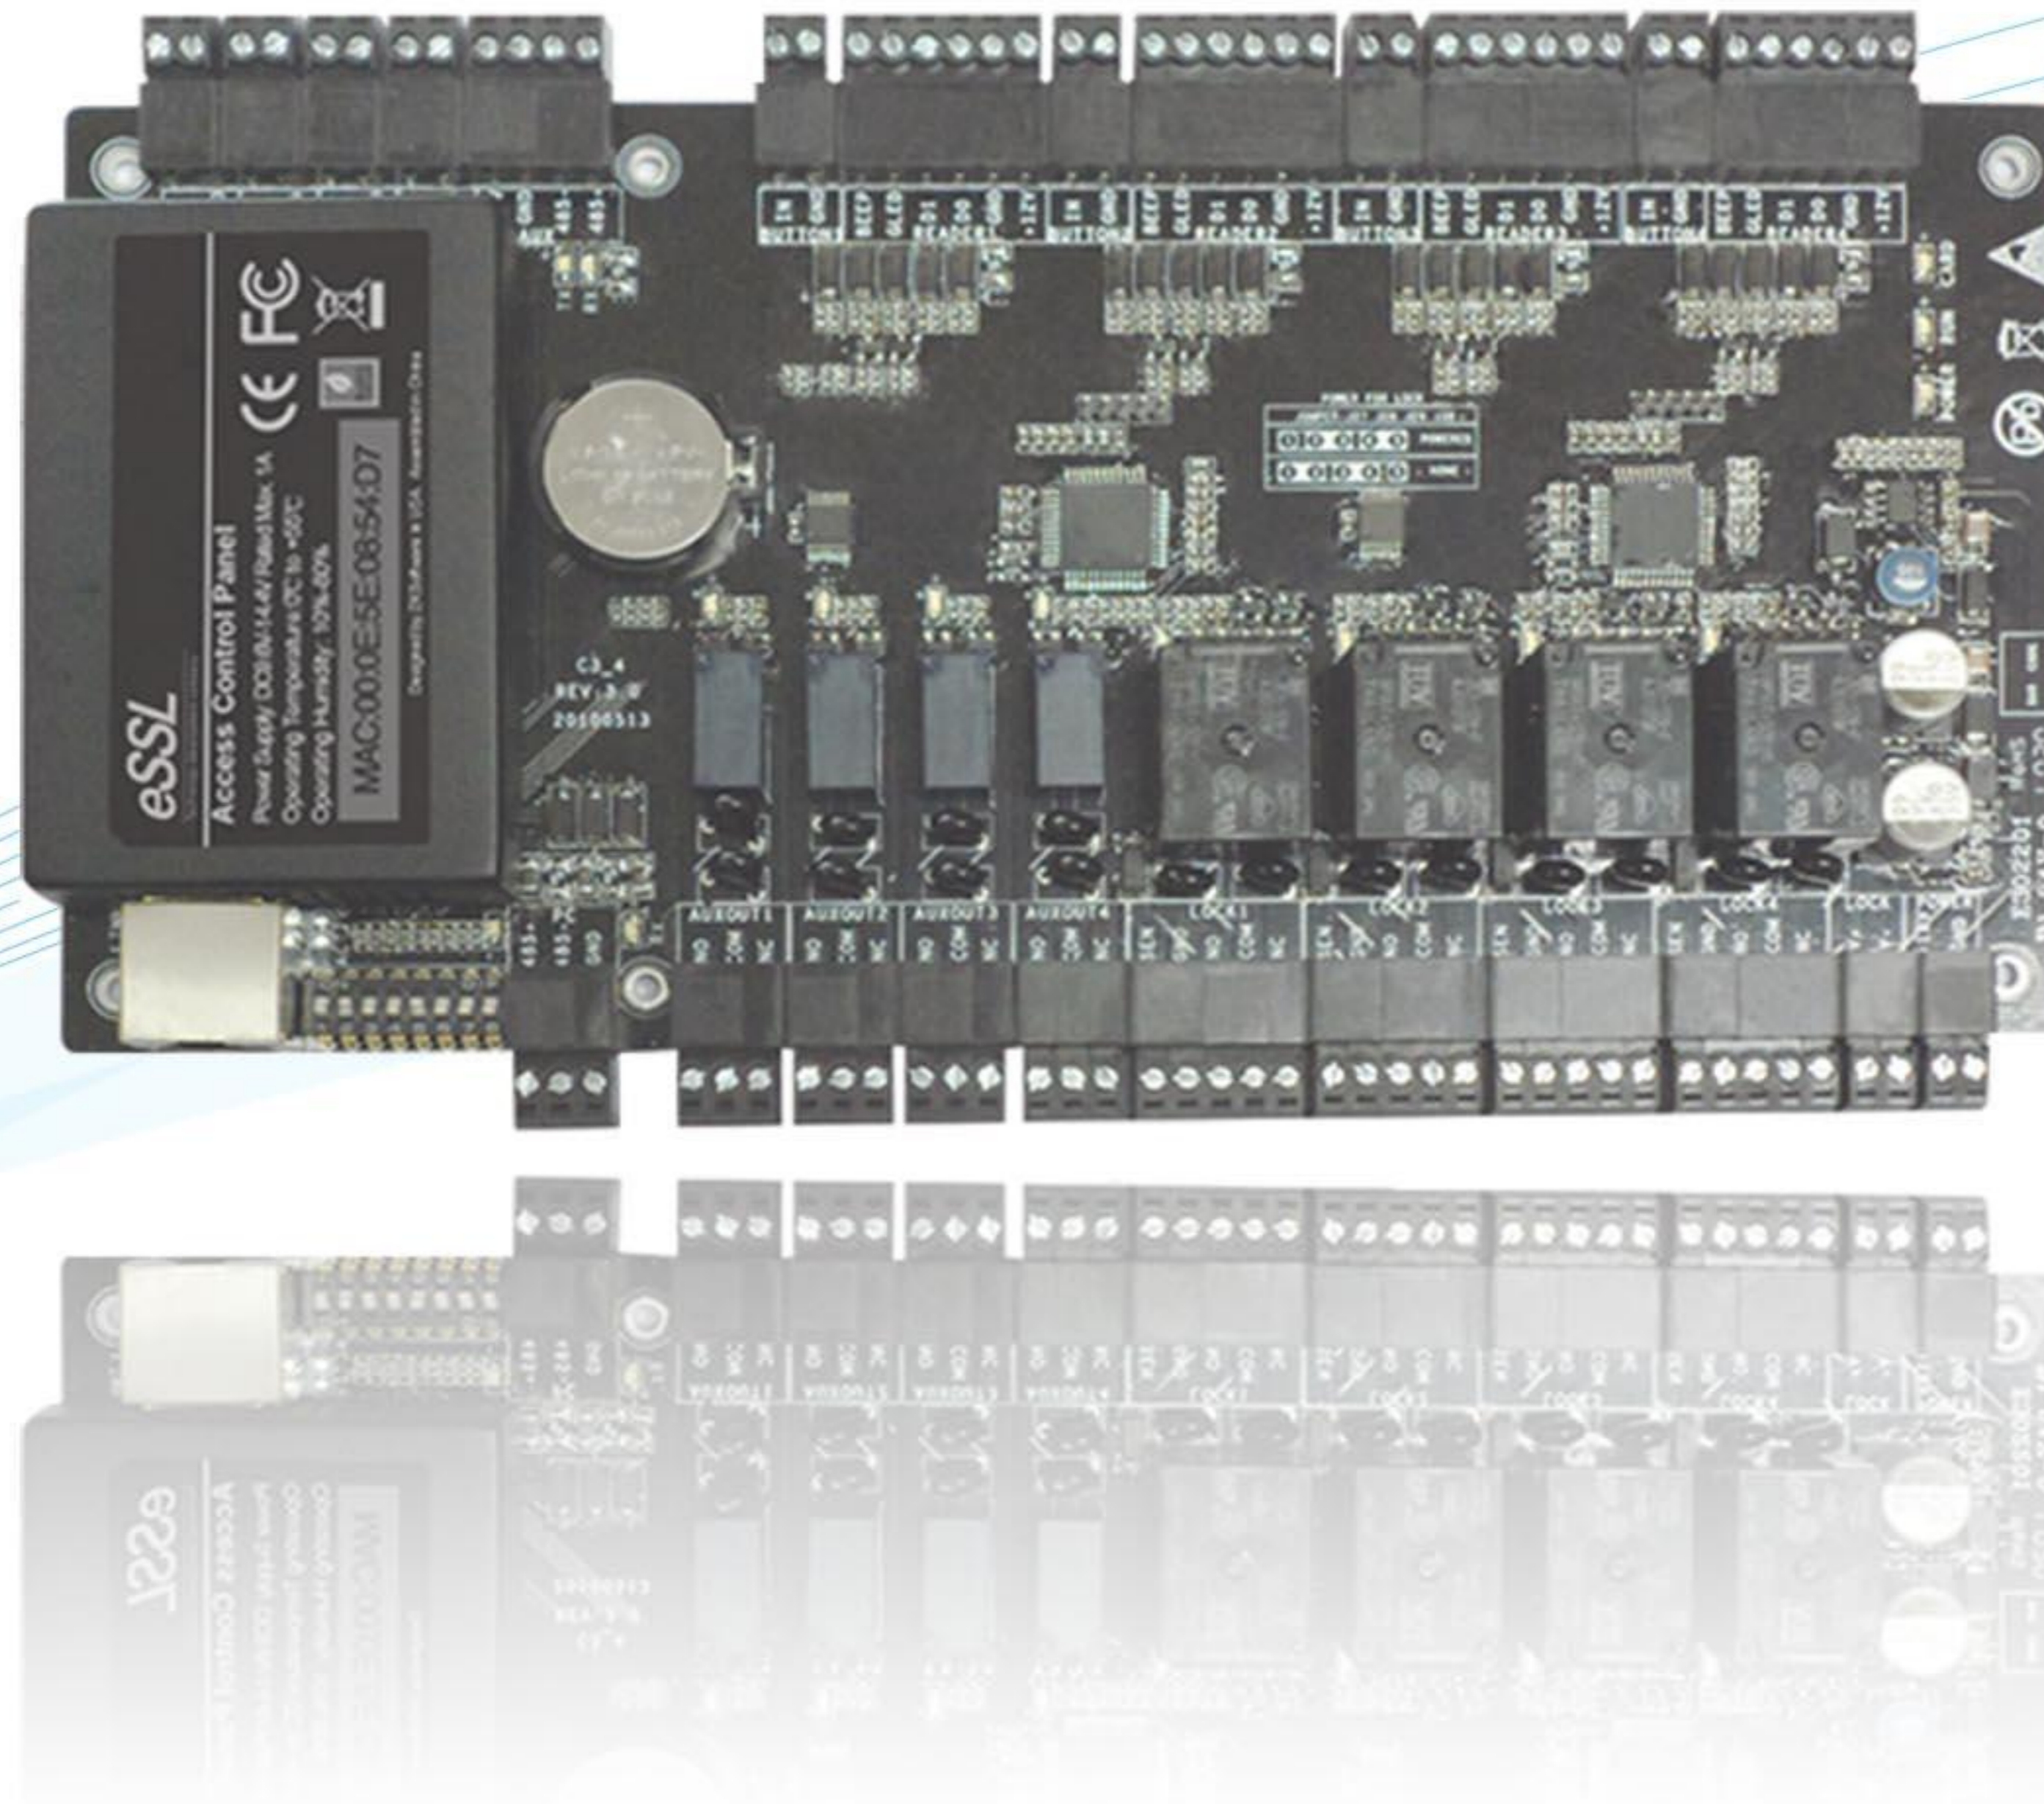

➔ Advanced Multidoor Access Control System - 4 Door

User Capacity: 30,000

Event Buffer: 1,00,000

CPU: 32bit MIPS CPU

RAM: 32MB

Flash Memory: 128 MB

Power/Current: DC 9.6V-14.4V, Rated Max. 1A

Communication: RS485, TCP/IP

LED Indicator: Yes, LED indication for communication, power status and punch card

Baud rate: 38400 BPS(Recommended),

9600 BPS,19200 BPS(Selectable)

Operating Temperature: 0°C - 55°C

Operating Humidity: 10% to 80%
relative humidity non-condensing

Dimension (mm): 218(W) x 106(H) (Single board)

345(W) x 275(H) x 70(D)

(With power supply and metal box)

Support : Proximity /Mifare / HID Readers

Options: Wiegand Readers - 4

RS 485 Readers - 8

Features:

- ▶ 256 time Zones, 256 access levels
- ▶ Anti-passback function
- ▶ Interlock function , Linkage function
- ▶ Multi-Card Opening function, Remote door opening and closing
- ▶ Real-Time monitoring Via Web browser
- ▶ Video server integration
- ▶ 4 auxiliary input may be connected to infrared body detectors,
- ▶ fire alarms, smoke detectors etc.
- ▶ 4 auxiliary output may be connected to alarms, cameras,door bells etc.

Connectivity Diagram

